Industrial Motors

Commercial & Appliance Motors

Automation

Digital & Systems

Energy

Transmission & Distribution

Coatings

SSW900 - SOFT-STARTER

Power and **full protection** to the motor

Driving efficiency and sustainability

SUMMARY

Introduction 04

Easy to use 07

Flexibility 07

Adjustable protections 08

Start and stop control methods 08

Connectivity 10

Applications 12

Coding 13

Specification 14

Accessories 15

Accessory installation 16

Dimmensions 16

Installation 17

Technical specifications 18

Block diagram 19

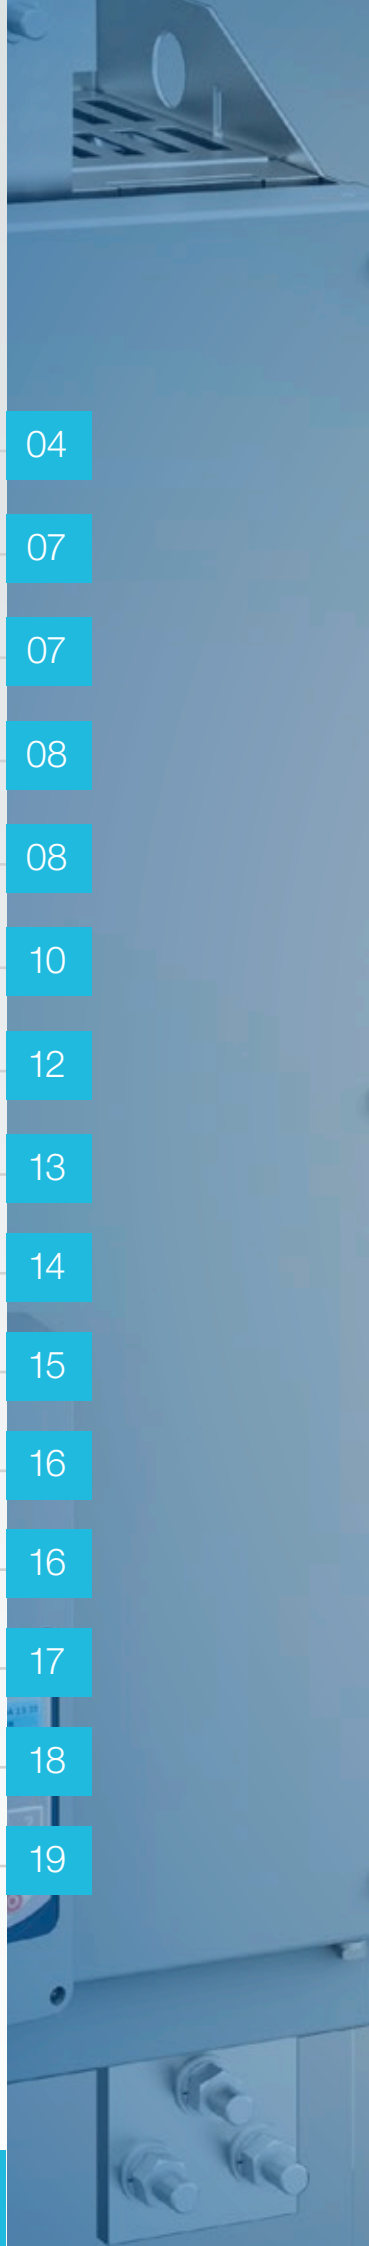

SSW900
SOFT - STARTER
SSW900
SOFT - STARTER

SSW900
SOFT-STARTER

Soft-starters are devices dedicated to the smooth acceleration and deceleration of three-phase induction motors by controlling the voltage applied to it.

Combining convenience and innovation, the SSW900 is the right choice for a complete motor protection and start/stop control. Developed for industrial or professional use, the new line of soft-starters allows simple and quick access to application information and configuration settings.

Using a well structured menu interface, the SSW900 line presents an unprecedented experience of interactivity with the user, allowing adjustments and configurations allied to online parameter help right on the HMI, in addition event logs with date and time and setup assistant are also available. The equipment brings also a built-in bypass, which contributes to extending the life time of the soft-stater, optimizing space and reducing heat dissipation inside electric panels.

POWER AND FULL PROTECTION TO THE MOTOR

- Connectivity
- Smaller dimensions
- Fire mode (emergency start)
- Optimal cost effectiveness
- Varnishing of the boards class 3C2 in the standard product or 3C3 as optional, according to IEC 60721-3-3
- Connection for motor thermistor (PTC)
- Graphic HMI
- Built-in bypass

Certifications[1)]

Note: 1) Please consult the availability of certification with your sales representative.

SSW900

Characteristics

- Current ranges from 10 to 1,400 A
- Supply voltage from 220 to 575 V ac (T5) or from 380 to 690 V ac (T6)
- Oriented start-up
- Standard connection (3 cables) or motor inside delta connection (6 cables)
- Integral motor thermal protection
- Reduction of voltage drops during motor start
- Pump control function for smart control of pumping systems that prevent water hammer and pressure overshoots in the hydraulic piping
- Great mechanical stresses reduction on the couplings and transmission devices (gear boxes, pulleys, gears, belts, etc.) during the motor start
- Increased motor and equipment lifetime
- Elimination of starting mechanical shock to couplings and driven equipment
- Operation at ambient temperature up to 55 °C without current[1)] derating
- Three braking methods to stop the motor and the load faster. Braking methods with or without external contactors
- Built-in bypass: minimizing power losses and heat dissipation in the thyristor, providing space reduction, contributing to energy saving and increasing the product's life



MORE ADVANTAGES

The SSW900 can substitute direct online starters or star-delta starters, bringing benefits to your application, such as:

- Electric energy savings
- Greater protection and increased durability of the electric motor
- Diagnosis and fault history
- Flexibility, it allows the installation of accessories in the application (Plug & Play)
- Graphic monitoring
- Customizable main screens

Menu navigation | Easy to install | Easy to operate | Simple monitoring

Note: 1) Models A to D.

Easy to use

USB port
Easy monitoring via PC or firmware updating

Removable HMI
Possibility of installation on panel or machine door

Easy access to the control terminals: digital and analog inputs and outputs

Bluetooth® connectivity[1)]

RTC
Real time clock with event log including date and time

Graphic HMI
Intuitive, customizable, complete

Flexibility

LED
Visual status indication

Two slots
Possibility to use two accessory modules

RTC (Real Time Clock) battery

Quick connect
Easily detachable terminals

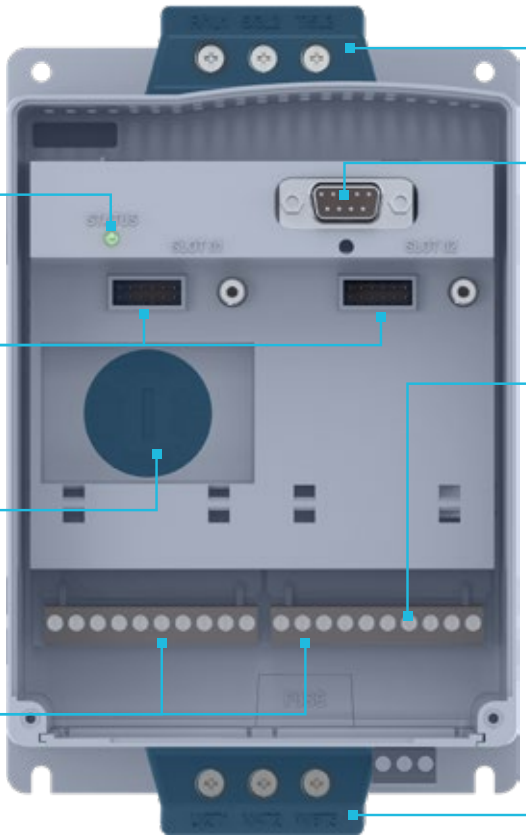

Power supply connection

HMI connection

I/O
Totally programmable inputs and outputs

- **6** isolated **digital inputs**[2)] 24 V dc
- **1 analog output** 0-10 V dc / 4-20 mA
- **1 input** for motor PTC thermistor
- **3** relay **outputs** 1.0 A / 240 V dc

Motor connection

Notes: 1) HMI with Bluetooth® connectivity available as an accessory item. Please consult availability of certification for your region.
2) The SSW900 has 6 digital inputs. DI1 to DI5 normal, and DI6 can be set to the motor PTC Input or used for digital input.

Adjustable protections

The SSW900 uses advanced techniques to detect supply line and connection faults, allowing the user to choose the actuation mode of protections (selectable by programming: fault or alarm) for total motor protection:

- Protections for overvoltage, undervoltage, voltage imbalance between phases and phase sequence
- Protections for motor overload and underload
- Thermal protections through Pt-100 reading and motor heating and cooling curves
- Protections against overcurrent and undercurrent, current imbalance, undertorque and overtorque, underpower and overpower
- Protections against short-circuit on the power side
- Bypass protections (overcurrent, undercurrent and failure in the bypass contactor opening)
- Minimum time interval between starts
- Protections against communication faults
- Actuation of the programmable protections between fault or alarm
- Fault auto-reset

Start and stop control methods

The SSW900 offers, through its algorithm, flexibility and high performance control to meet application requirements on start and stop cycles of three-phase induction motors.

	Actuation	
	Start	Stop
Voltage ramp	✓	✓
Voltage ramp + current limit	✓	✗
Current limit	✓	✗
Current ramp	✓	✗
Pump control[1)]	✓	✓
Torque control[2)]	✓	✓
D.O.L SCR	✓	✗
Coast to stop	✗	✓

Notes: 1) The setting of the function Pump Control is allowed for stopping the motor only when it is used at the starting as well.
2) The setting of the function Torque Control is allowed for stopping the motor only when it is used at the starting as well.

Main features

Forward / Reverse

JOG

Kick start

Fire mode (emergency start)

Allows starting and stopping the motor in emergency situations, even when any fault occurs, disregarding the SSW or motor protections. Used to drive hydraulic pumps for firefighting systems.

High performance graphic HMI

Indication of all variables of the motor or SSW in an easy and intuitive way, using many units and formats, through bar graphs or time graphs.

Diagnosis

Several status of the SSW are saved at certain moments to facilitate the diagnosis of faults and problems in the application or in the motor. For instance:

- Faults, with history of all faults and storage in CSV file.
- Alarms, with history of all alarms and storage in CSV file.
- Event history with storage in CSV file.
- All saved information goes with RTC time and date stamp.

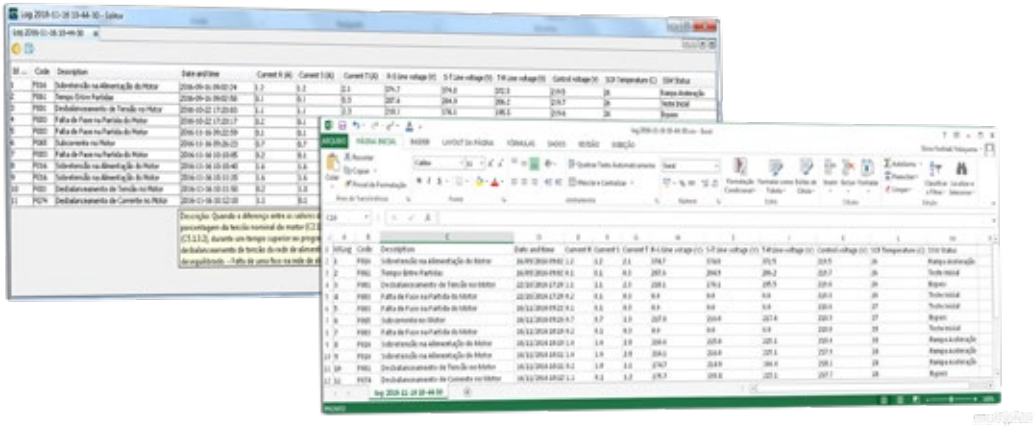

Oriented startup

Guides the user on how to program the SSW900 easily.

Connectivity

The SSW900 can be integrated to the main Fieldbus industrial communication networks, such as Profibus-DP, CANopen, DeviceNet and EtherNet/IP, using the appropriate plug-in module.

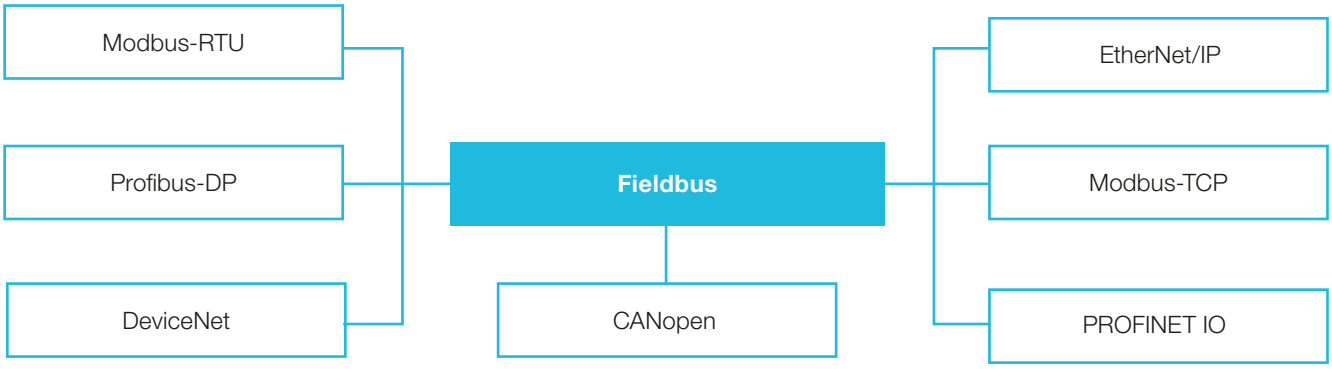

WEG Programming Suite (WPS)

WPS is an integrated PC software that assists in the creation of automation applications allowing graphical monitoring, parameterization and programming in Ladder language (IEC 61131-3) of several WEG product families.

Software WPS

Easy and intuitive environment

SoftPLC
It is a software resource added to the SSW900 which allows the user to implement and debug logic projects equivalent to a small PLC (Programmable Logic Controller), customizing and integrating the SSW900 to the application. The free WPS programming software is available on: *www.weg.net*.

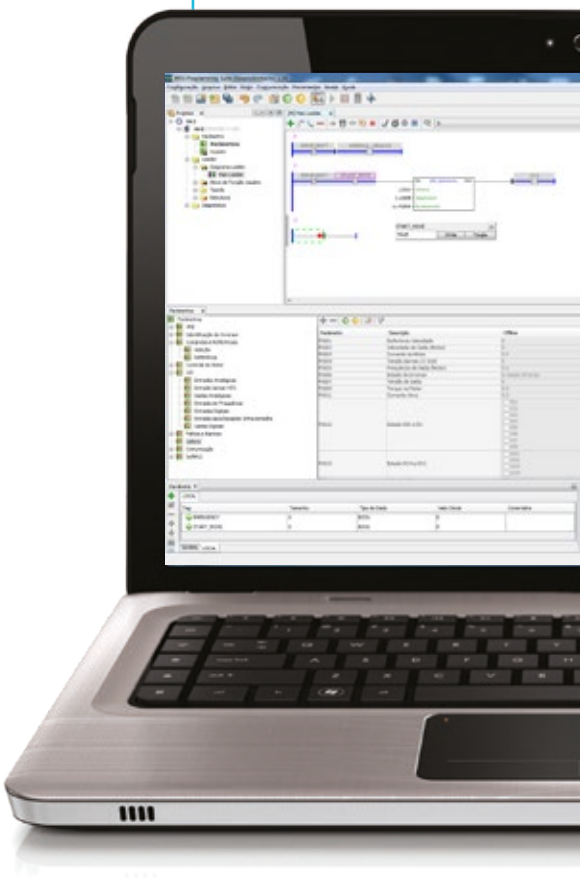

WEG WPS for mobile available:

GET IT ON Google Play

Download on the App Store

Free on the website: *www.weg.net*.

Bluetooth® communication®1)

USB connector on the HMI, available on standard product

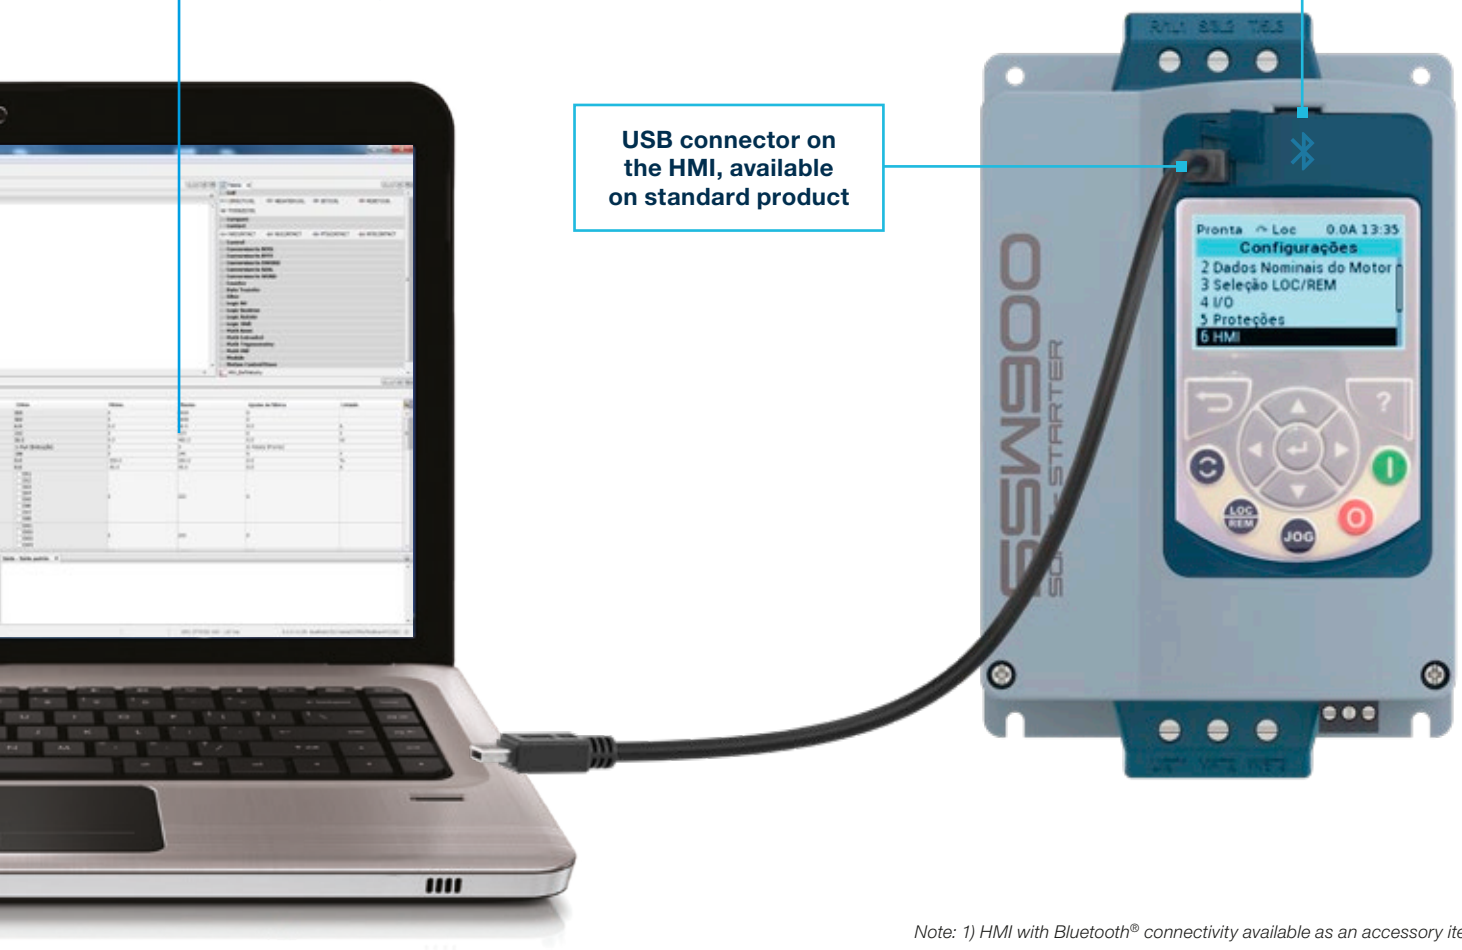

Note: 1) HMI with Bluetooth® connectivity available as an accessory item.

Applications

Cement and Mining

- Dosing pumps
- Sifters / vibrating tables
- Dynamic graders
- Conveyor belts

Chemical and Petrochemical

- Fans / exhaust fans
- Centrifugal pumps
- Dosing pumps
- Centrifuges
- Stirrers / mixers
- Compressors
- Soap extruders

Wood

- Veneer machines
- Polishing machines
- Cutting machines
- Wood chippers
- Saw and plains

Plastic and Rubber

- Extruders
- Blowers
- Mixers
- Calenders
- Granulators

Water & Wastewater

- Centrifugal-pumps
- Suppression systems

Food & Beverage

- Continuous centrifuges
- Roller tables
- Conveyor belts
- Bottling lines

Ceramic

- Fans / exhaust fans
- Continuous dryers / ovens
- Ball mills
- Roller tables
- Conveyor belts

Steel and Metallurgy

- Fans / exhaust fans
- Conveyors
- Drilling machines / grinders
- Pumps

Glass

- Fans / exhaust fans
- Continuous dryers / ovens
- Roller tables

Textile

- Stirrers / mixers
- Dryers / washing machines

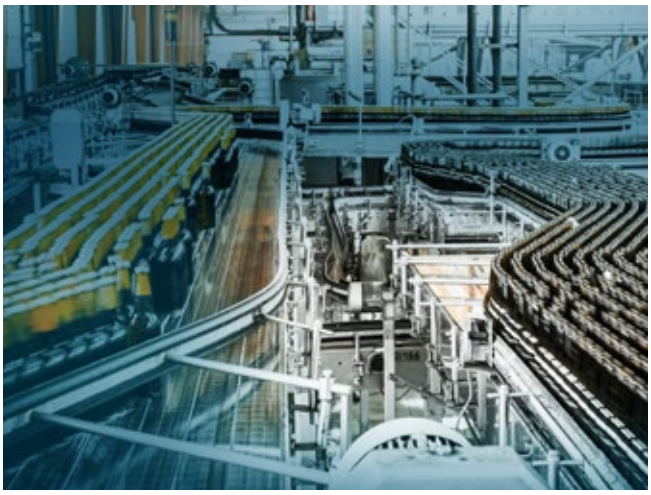

Coding[1)]

1	2	3	4	5	6	7
SSW900	A	0010	T5	E2	---	---

1 - Soft-Starter SSW900
2 - Frame size of the SSW900, according to the table below
3 - Rated output current, according to the table below

Frame size	Rated current
A	0010 = 10 A
	0017 = 17 A
	0024 = 24 A
	0030 = 30 A
B	0045 = 45 A
	0061 = 61 A
	0085 = 85 A
	0105 = 105 A
C	0130 = 130 A
	0171 = 171 A
	0200 = 200 A
D	0255 = 255 A
	0312 = 312 A
	0365 = 365 A
	0412 = 412 A
E	0480 = 480 A
	0604 = 604 A
	0670 = 670 A
F	0820 = 820 A
	0950 = 950 A
G	1100 = 1,100 A
	1400 = 1,400 A

Note: 1) Other configurations available upon request.

4 - Rated power supply voltage

T5	220 - 575 V
T6	380 - 690 V

5 - Rated electronic supply voltage

E2	110 - 240 V
E3	110 - 130 V[1)]
E4	220 - 240 V[1)]

Note: 1) Only for frame D, E, F and G.

6 - Special hardware versions

Blank	Electronic boards with coating class 3C2
EC	Electronic boards with class 3C3 extra coating

7 - Special software version

Blank	Standard software
Sx	Special software

Specification

The power ratings for the maximum applicable motor shown in the following tables are referential and valid for WEG 4-pole three-phase induction motors under light load conditions (e.g., centrifugal pump). Motor rated power may vary according to the motor data and application.

Standard connection (with 3 cables)

SSW900	Frame size	Rated current (A)	Maximum applicable motor											
			220/230 V[1]		380/400 V		440/460 V		525 V		575 V		690 V[2]	
			HP	kW	HP	kW	HP	kW	HP	kW	HP	kW	HP	kW
SSW900A0010T5E2	A	10	3	2.2	6	4.5	7.5	5.5	7.5	5.5	10	7.5	-	-
SSW900A0017T5E2		17	6	4.5	10	7.5	12.5	9.2	15	11	15	11	-	-
SSW900A0024T5E2		24	7.5	5.5	15	11	15	11	20	15	20	15	-	-
SSW900A0030T5E2		30	10	7.5	20	15	20	15	25	18.5	30	22	-	-
SSW900B0045T5E2	B	45	15	11	30	22	30	22	40	30	40	30	-	-
SSW900B0061T5E2		61	20	15	40	30	50	37	50	37	60	45	-	-
SSW900B0085T5E2		85	30	22	60	45	60	45	75	55	75	55	-	-
SSW900B0105T5E2		105	40	30	75	55	75	55	75	55	100	75	-	-
SSW900C0130□E2	C	130	50	37	75	55	100	75	125	90	125	90	150	110
SSW900C0171□E2		171	60	45	125	90	125	90	150	110	175	132	220	165
SSW900C0200□E2		200	75	55	150	110	150	110	200	150	200	150	250	185
SSW900D0255□E♦	D	255	100	75	175	132	200	150	250	185	250	185	340	250
SSW900D0312□E♦		312	125	90	200	150	250	185	300	220	300	220	430	320
SSW900D0365□E♦		365	150	110	250	185	300	225	350	260	400	300	470	350
SSW900D0412□E♦		412	150	110	300	220	350	260	440	315	450	330	500	370
SSW900E0480□E♦	E	480	200	150	350	260	400	300	500	370	500	370	600	450
SSW900E0604□E♦		604	250	185	450	330	500	370	600	450	650	485	750	550
SSW900E0670□E♦		670	250	185	500	370	550	410	650	485	750	550	850	630
SSW900F0820□E♦	F	820	350	260	550	410	700	525	800	600	850	630	1,000	750
SSW900F0950□E♦		950	400	300	750	550	800	600	900	670	1,050	775	1,150	860
SSW900G1100□E♦	G	1,100	450	330	800	600	900	670	1,100	810	1,200	900	1,300	1,000
SSW900G1400□E♦		1,400	550	410	1,000	750	1,200	900	1,400	1,050	1,500	1,100	1,700	1,250

Notes: 1) Only for T5 versions.
2) Only for T6 versions.
Change □ by T5 for products with 220-575 V supply voltage or T6 for 380-690 V.
Change ♦ by 3 to select the control voltage of 110-130 V or by 4 to 220-240 V.
Models ≤412 A: AC-53b 3-25:335, ambient temperature of 55 °C.
Models ≥480 A: AC-53b 3-25:695, ambient temperature of 40 °C.
Models from 130 A to 200 A: with ventilation kit.
WEG motors Premium or Plus, IV poles.

Motor inside delta connection (with 6 cables)

SSW900	Frame size	Maximum applicable motor										
		Rated current (A)	220/230 V[1]		380/400 V		440/460 V		525 V[2]		575 V[2]	
			HP	kW	HP	kW	HP	kW	HP	kW	HP	kW
SSW900C0130T5E2	C	225	75	55	150	110	175	132	200	150	250	185
SSW900C0171T5E2		296	125	90	200	150	200	150	250	185	300	220
SSW900C0200T5E2		346	150	110	250	185	300	220	300	220	350	260
SSW900D0255T5E♦	D	441	175	132	300	220	350	260	400	300	450	330
SSW900D0312T5E♦		540	200	150	350	260	450	330	500	370	550	410
SSW900D0365T5E♦		631	250	185	450	330	500	370	600	450	650	485
SSW900D0412T5E♦		713	250	185	500	370	600	450	700	525	800	600
SSW900E0480T5E♦	E	831	350	260	600	450	700	525	800	600	900	670
SSW900E0604T5E♦		1,046	450	330	750	550	850	630	1,050	775	1,150	820
SSW900E0670T5E♦		1,160	500	370	850	630	950	700	1,150	820	1,250	920
SSW900F0820T5E♦	F	1,420	600	450	1,000	750	1,200	900	1,400	1,050	1,550	1,140
SSW900F0950T5E♦		1,645	720	520	1,200	900	1,400	1,030	1,650	1,200	1,800	1,325
SSW900G1100T5E♦	G	1,905	800	600	1,400	1,030	1,600	1,175	1,900	1,400	2,100	1,550
SSW900G1400T5E♦		2,425	1,050	775	1,750	1,290	2,000	1,475	2,450	1,800	2,650	1,950

Notes: 1) Only for T5 versions.
2) Only for T6 versions.
Change ♦ by 3 to select the control voltage of 110-130 V or by 4 to 220-240 V.
Models ≤412 A: AC-53b 3-25:335, ambient temperature of 55 °C.
Models ≥480 A: AC-53b 3-25:695, ambient temperature of 40 °C.
Models from 130 A to 200 A: with ventilation kit.
WEG motors Premium or Plus, IV poles.

Accessories

Accessory	Description	Image
	Accessories for communication and control - Slots 1 and 2	
SSW900-CAN-W	CANopen and DeviceNet communication plug-in module	
SSW900-CRS485-W	Modbus-RTU communication plug-in module	
SSW900-CDN-N	DeviceNet - Anybus communication plug-in module	
SSW900-CPDP-N	Profibus-DP - Anybus communication plug-in module	
SSW900-CETH-IP-N	EtherNet/IP - Anybus communication plug-in module	
SSW900-CMB-TCP-N	Modbus-TCP - Anybus communication plug-in module	
SSW900-CPN-IO-N	PROFINET IO - Anybus communication plug-in module	
SSW900-CETH-W	EtherNet/IP and Modbus-TCP communication plug-in module	
SSW900-HMI-BLT	Remote operating interface with Bluetooth® communication	
SSW900-PT100-W	Temperature plug-in module for Pt-100 sensors - 6 channels	
	Accessories for mechanical installation	
SSW0708900-KVT-2B	Ventilation kit for frame B (currents from 45 to 105 A)	
SSW0708900-KVT-3C	Ventilation kit for frame C (currents from 130 to 200 A)	
SSW0708900-IP20-3C	IP20 kit for frame C (currents from 130 to 200 A)	
SSW0708900-IP20-4D	IP20 kit for frame D (currents from 255 to 412 A)	
SSW0708900-PROT-3C	Front cover kit for power terminals of frame C (currents from 130 to 200 A)	
SSW0708900-PROT-4D	Front cover kit for power terminals of frame D (currents from 255 to 412 A)	
SSW900-PROT-E	Front cover kit for power terminals of frame E (currents from 480 to 670 A)	
	Other accessories	
SSW900-KMD-CB01	Frame kit for HMI + 1 m cable	-
SSW900-KMD-CB02	Frame kit for HMI + 2 m cable	-
SSW900-KMD-CB03	Frame kit for HMI + 3 m cable	-
SSW900-KMD-CB05	Frame kit for HMI + 5 m cable	-
SSW900-KMD-CB07	Frame kit for HMI + 7,5 m cable	-
SSW900-KMD-CB10	Frame kit for HMI + 10 m cable	-
SSW900-KMD-CB20	Frame kit for HMI + 20 m cable	-
SSW900-KECA-10	Current acquisition kit for 10 A	-
SSW900-KECA-17	Current acquisition kit for 17 A	-
SSW900-KECA-24	Current acquisition kit for 24 A	-
SSW900-KECA-30	Current acquisition kit for 30 A	-
SSW900-KECA-45	Current acquisition kit for 45 A	-
SSW900-KECA-61	Current acquisition kit for 61 A	-
SSW900-KECA-85	Current acquisition kit for 85 A	-
SSW900-KECA-105	Current acquisition kit for 105 A	-
SSW900-KECA-130	Current acquisition kit for 130 A	-
SSW900-KECA-171	Current acquisition kit for 171 A	-
SSW900-KECA-200	Current acquisition kit for 200 A	-
SSW900-KECA-255	Current acquisition kit for 255 A	-
SSW900-KECA-312	Current acquisition kit for 312 A	-
SSW900-KECA-365	Current acquisition kit for 365 A	-
SSW900-KECA-412	Current acquisition kit for 412 A	-
SSW900-6BAR-E	Kit with six bars for frame E (currents from 480 to 670 A)	-
SSW900-6BAR-F	Kit with six busbars for frame F (currents of 820 and 950 A)	-
SSW900-3BAR-G	Kit with three busbars for frame G (currents of 1,100 and 1,400 A)	-

Accessory installation

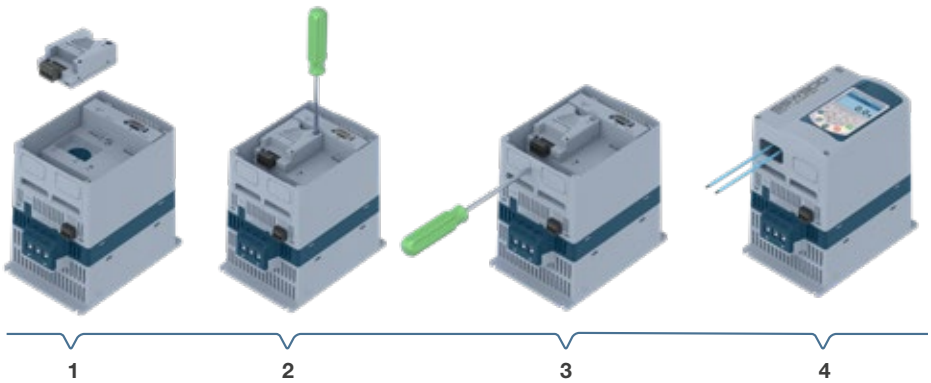

Dimmensions

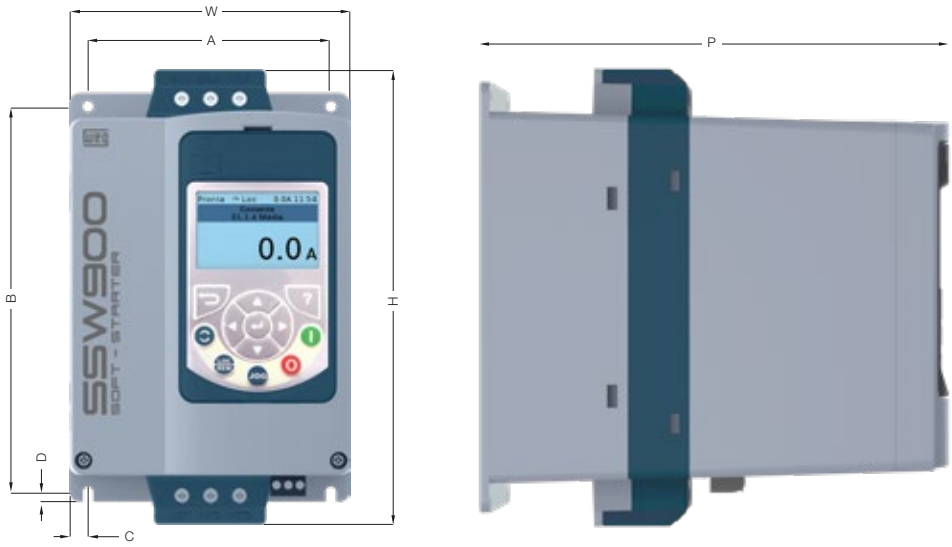

Frame size	Height (H) mm (in)	Width (W) mm (in)	Depth (P) mm (in)	(A) mm (in)	(B) mm (in)	(C) mm (in)	(D) mm (in)	Fastening screw	Weight (kg) (lb)	Degree of protection
A	200 (7.87)	127 (5)	203 (7.99)	110 (7.33)	175 (6.88)	8.5 (0.33)	4.3 (0.16)	M4	1.93 (4.25)	IP20
B	208 (8.18)	144 (5.66)	260 (10.23)	132 (5.19)	148 (5.82)	6 (0.23)	3.4 (0.13)	M4	4.02 (8.86)	IP20
C	276 (10.86)	223 (8.77)	261 (10.27)	208 (8.18)	210 (8.26)	7.5 (0.29)	5 (0.19)	M5	6.55 (14.44)	IP00[1)]
D	331 (13.03)	227 (8.93)	282 (11.10)	200 (7.87)	280 (11.02)	15 (0.59)	9 (0.35)	M8	12.83 (28.28)	IP00[1)]
E	575 (22.63)	390 (15.35)	260 (10.23)	270 (10.62)	480 (18.89)	56 (2.20)	10 (0.40)	M8	38 (83.75)	IP00
F	800 (31.50)	464 (18.27)	316 (12.44)	320 (12.60)	625 (24.61)	72 (2.83)	10 (0.39)	M8	75.40 (166.23)	IP00
G	914 (35.98)	539 (21.22)	316 (12.44)	369 (14.53)	732 (28.82)	85 (3.35)	12 (0.47)	M10	107.20 (236.34)	IP00

Note: 1) IP20 using SSW900-KIP accessory.

Installation

Standard (3 cables)

Motor in Y

Motor in △

$$I_{Soft\text{-}Starter} = I_{Rated}$$

Inside delta (6 cables)

$$I_{Soft\text{-}Starter} = \frac{I_{Rated}}{\sqrt{3}}$$ = 58% of I_{Rated} (After the start)

$$I_{Soft\text{-}Starter} = \frac{I_{Rated}}{1.5}$$ = 67% of I_{Rated} (During the start)

Minimum free spaces recommended

Frame size	A mm (in)	B mm (in)	C mm (in)
A	50 (2)	50 (2)	30 (1.2)
B	80 (3.2)	80 (3.2)	30 (1.2)
C	100 (4)	100 (4)	30 (1.2)
D	150 (6)	150 (6)	30 (1.2)
E	150 (6)	150 (6)	30 (1.2)
F	180 (7.09)	180 (7.09)	30 (1.18)
G	180 (7.09)	180 (7.09)	30 (1.18)

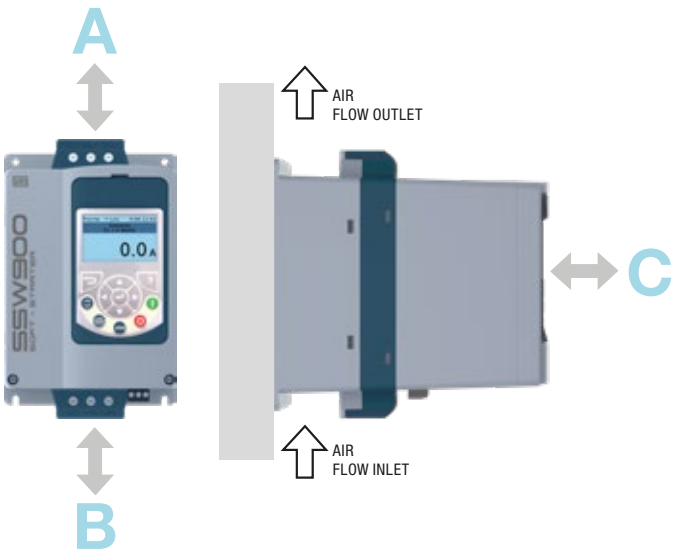

Technical specifications

Power supply	Power voltage (R/1L1, S/3L2, T/5L3)	T5 = 220...575 V (-15%...+10%) for standard connection or 220...500 V (-15%...+10%) inside motor delta connection T6 = 380...690 V (-15%...+10%) for standard connection or 380...575 V (-15%...+10%) inside motor delta connection
	Control voltage	10 A to 200 A models: 110 to 240 V (-15% to +10%), or 93.5 to 264 V ac 255 to 1,400 A models: 110 to 130 V (-15% to +10%), or 93.5 to 143 V ac, or 220 to 240 V (-15% to +10%), or 176.8 to 264 V ac
	Frequency	50 to 60 Hz (±10%)
	Power consumption	10 A to 200 A models: 32 VA 255 to 412 A models: 70 VA continuous, 700 VA additional during the closing of the internal bypass 480 A to 670 A models: 90 VA continuous, 700 VA additional during the closing of the internal bypass Models from 820 A to 950 A: 140 VA continuous, 800 VA additional during the closing of the internal bypass Models from 1,100 A to 1,400 A: 180 VA continuous, 850 VA additional during the closing of the internal bypass
Inputs	Digital	6 isolated digital inputs[1)] Minimum high level: 18 V dc Minimum low level: 3 V dc Maximum voltage: 30 V dc Input current: 11 mA @ 24 V dc Programmable functions
Outputs	Digital	2 relays with NO contacts, 240 V ac, 1 A, programmable functions 1 relay with NO/NC contact, 240 V ac, 1 A, programmable functions
	Analog	1 analog output 0 to 10 V or 0/4 to 20 mA configurable by software
HMI (Human Machine Interface)	Standard HMI IHM Bluetooth® (accessory)	12 keys: run/stop, forward/reverse, Jog, local/remote, navigation buttons: left, right, up, down, enter, back and help Graphic LCD display Allows monitoring/changing all SSW parameters Possibility of external mounting, panel door USB for firmware updates or communication with the product
PC connection for programming	USB connector in the HMI	USB standard rev. 2.0 (basic speed) Mini B-type USB plug Interconnecting cable: shielded USB cable, standard host/device shielded USB cable

Note: 1) DI1 to DI5 normal, and DI6 can be set to the motor PTC Input or used for digital input. (As thermistor: Actuation: 3.9 kΩ, relase: 1.6 kΩ Mininum resistance 100 Ω.)

Standards

Safety standards	UL508 - *industrial control equipment* EN 60947-4-2, LVD 2006/95/EC - *low-voltage switchgear and controlgear*
Electromagnetic compatibility standards	CISPR 11 - *industrial, scientific and medical* (ISM) *radio-frequency equipment - electromagnetic disturbance characteristics - limits and methods of measurement* EN 61000-4-2 - *electromagnetic compatibility* (EMC) - *part* 4: *testing and measurement techniques - section* 2: *electrostatic discharge immunity test* EN 61000-4-3 - *electromagnetic compatibility* (EMC) - *part* 4: *testing and measurement techniques - section* 3: *radiated, radio-frequency, electromagnetic field immunity test* EN 61000-4-4 - *electromagnetic compatibility* (EMC) - *part* 4: *testing and measurement techniques - section* 4: *electrical fast transient/burst immunity test* EN 61000-4-5 - *electromagnetic compatibility* (EMC) - *part* 4: *testing and measurement techniques - section* 5: *surge immunity test* EN 61000-4-6 - *electromagnetic compatibility* (EMC) - *part* 4: *testing and measurement techniques - section* 6: *immunity to conducted disturbances, induced by radio-frequency fields* EN 61000-4-11 - *electromagnetic compatibility* (EMC) - *part* 4: *testing and measurement techniques - section* 11: *voltage dips, short interruptions and voltage variations immunity tests*
Mechanical construction standards	EN 60529 - *degrees of protection provided by enclosures (IP code)* UL50 - *enclosures for electrical equipment* IEC 60721-3-3 - *classification of environmental conditions*

Block diagram

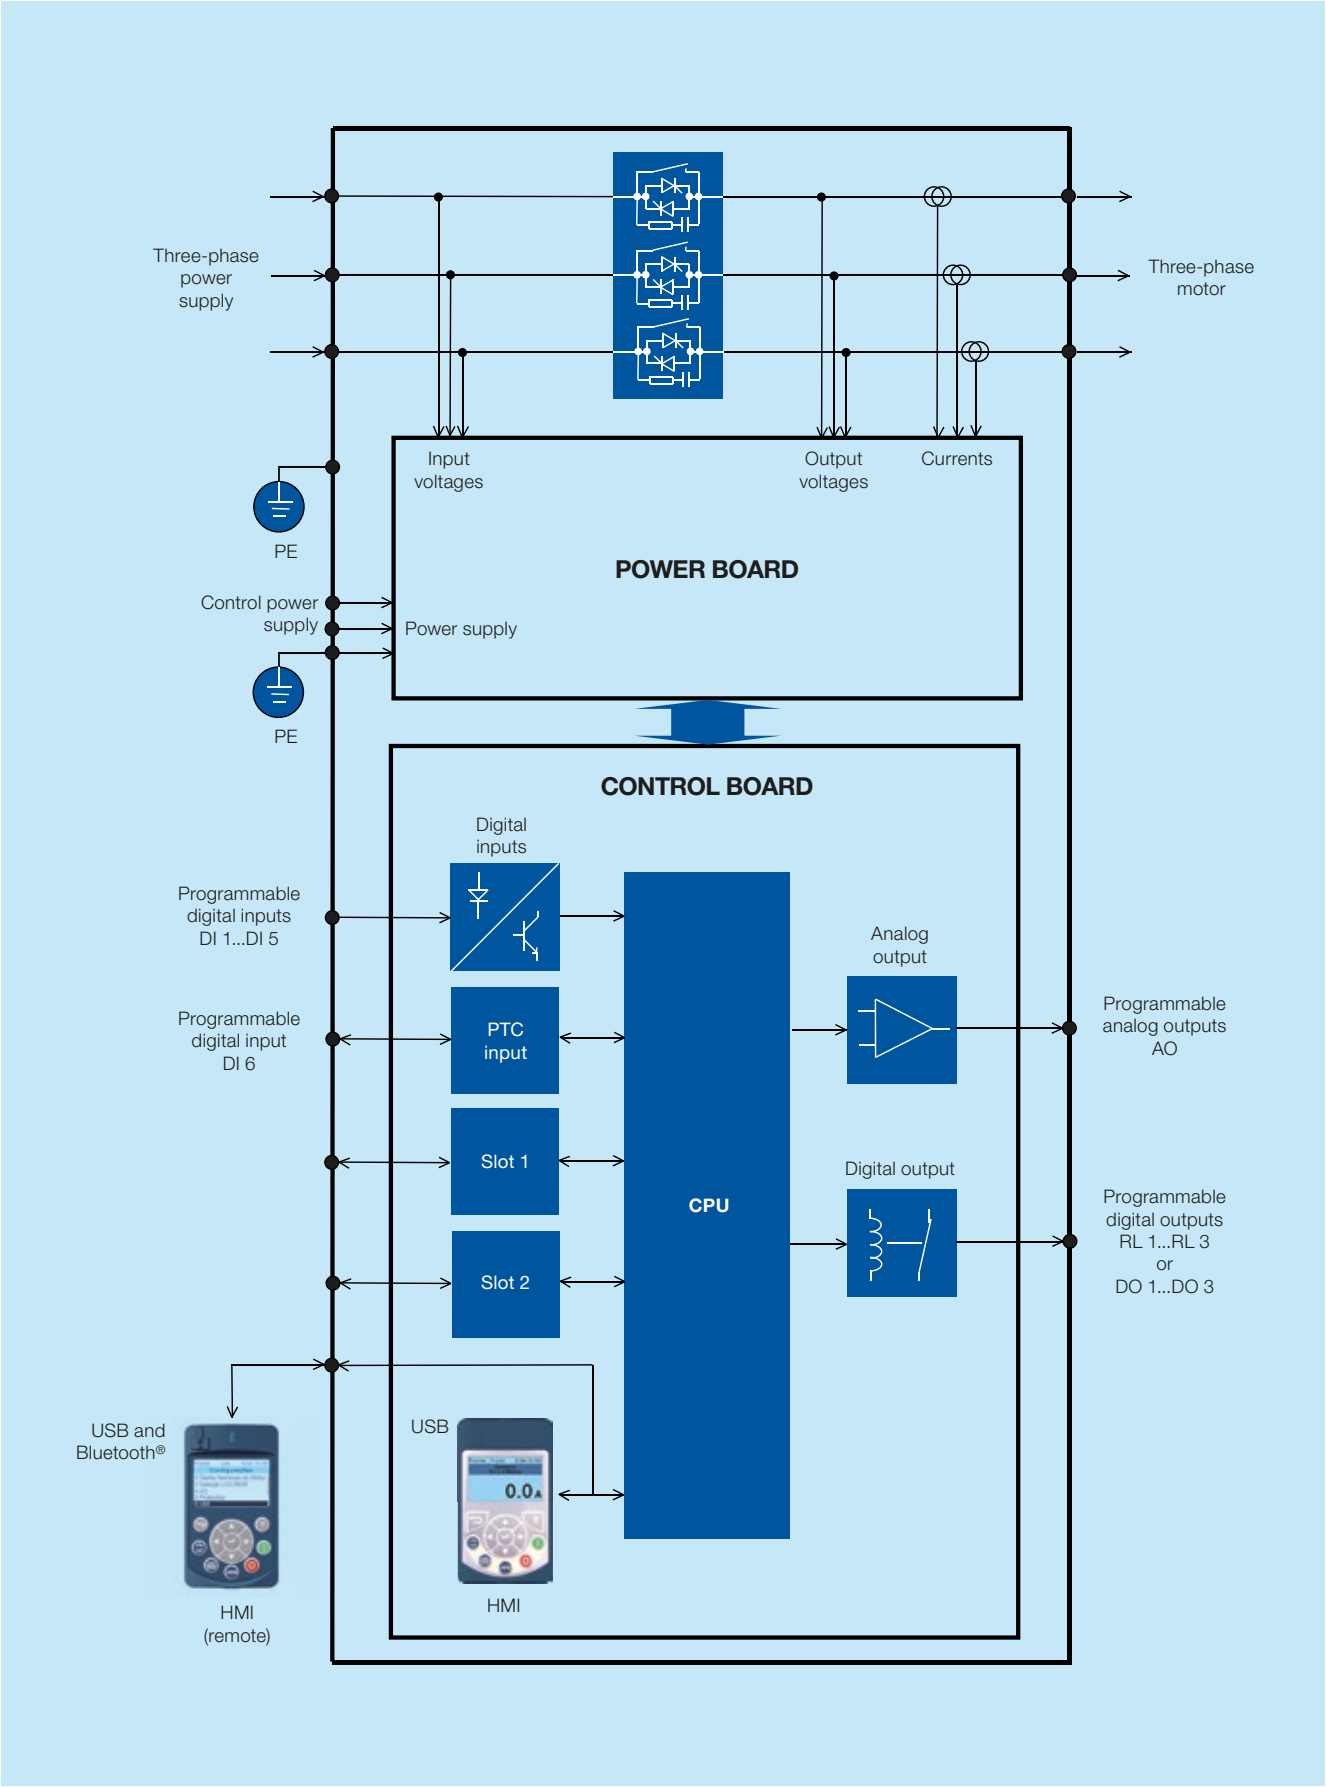

Notes

Notes

Global presence is essential, as much as understanding your needs.

Global Presence

With more than 40,000 employees worldwide, WEG is one of the largest electric motors, electronic equipments and systems manufacturers. We are constantly expanding our portfolio of products and services with expertise and market knowledge. We create integrated and customized solutions ranging from innovative products to complete after-sales service.

WEG's know-how guarantees our ***SSW900 - Soft-Starter*** is the right choice for your application and business, assuring safety, efficiency and reliability.

Availability is to have a global support network

Partnership is to create solutions that suits your needs

Competitive edge is to unite technology and inovation

Know More

High performance and reliable products to improve your production process.

Excelence is to provide a whole solution in industrial automation that improves our customers productivity.

Visit: **www.weg.net**

youtube.com/wegvideos

The scope of WEG Group solutions
is not limited to products and solutions
presented in this catalogue.
To see our portfolio, contact us.

For WEG's worldwide
operations visit our website

www.weg.net

+55 47 3276.4000

automacao@weg.net

Jaraguá do Sul - SC - Brazil

Cod: 50072781 | Rev: 10 | Date (m/y): 07/2023.
The values shown are subject to change without prior notice.
The information contained is reference values.